



Concertina type BTO-22

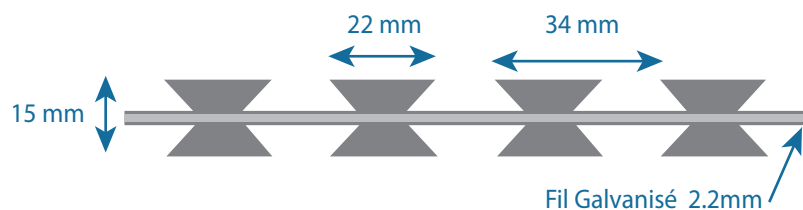

Modele	Diamètre (mm)	Material	Longueur utilisation	Nombre de spires	Diamètre de Fil	Epaisseur
BTO-22	Ø 450	Galva 060g/m2	8 / 10 ml	56	2.2 mm	0.5 mm
BTO-22	Ø 600	Galva 060g/m2	10 / 12 ml	56	2.2 mm	0.5 mm
BTO-22	Ø 700	Galva 060g/m2	9 / 10.3 ml	56	2.2 mm	0.5 mm
BTO-22	Ø 980	Galva 200g/m2	7.5 / 9 ml	52	2.2 mm	0.5 mm

Concertina type CBT-60

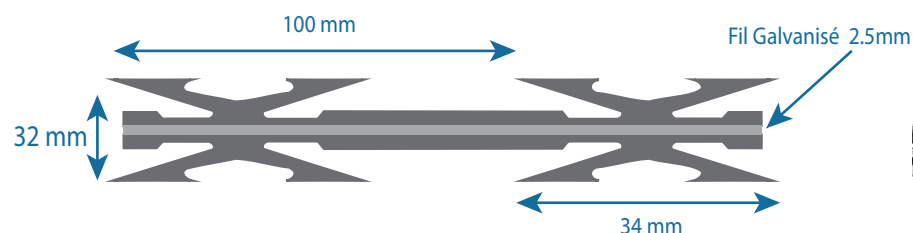

Modele	Diamètre (mm)	Material	Longueur utilisation	Nombre de spires	Diamètre de Fil	Epaisseur
CBT-60	Ø 450	Galva 200g/m2	7 ml	56	2.5 mm	0.5 mm
CBT-60	Ø 730	Galva 200g/m2	10 ml	56	2.5 mm	0.5 mm
CBT-60	Ø 960	Galva 200g/m2	10 ml	56	2.5 mm	0.5 mm

Accessoires de fixation



Tendeur



Fil Galvanisé



Tirfond